

STAINLESS STEEL K-SERIES

Submersible and End-Suction Centrifugal Pumps



More Solutions for Your Pumping Needs

Ideal for High Flow Liquid Transfer, Booster Pump, Draining or Low Pressure Spraying

Quality and Innovation Our Keys to Success

For more than 30 years CAT PUMPS has been the leading pump supplier for the car wash industry and the pump of choice in thousands of industrial cleaning and process applications. Because of CAT PUMPS' commitment to building only the highest quality pumps, we have earned the reputation of being the longest lasting, most trouble-free pumps available. We have also earned the reputation for offering new and innovative solutions for pumping applications.

The K-Series pumps compliment our triplex high pressure positive displacement pump line. These pumps offer solutions to many high flow, low pressure industrial pumping needs whether it's the pumping of fresh water, semi-dirty water or liquids with some suspended solids.

The K-series **submersible and end-suction centrifugal pumps** are built of stainless steel for long lasting performance and exceptional value. These high quality components offer a stronger, lighter weight and more durable pump than the conventional cast iron pumps at a very competitive price.

A special technology has been developed to pressure bulge form the stainless steel components for these pumps. The result of this new process is superior quality, greater strength, increased efficiencies, lighter weight, continuous-duty performance and exceptional value. These pumps will definitely outperform anything in its class.

There are over 100 models to choose from including options for manual or automatic; single or three phase; TEFC or open-drip. The centrifugal pumps are available with optional chemical resistant or high temperature seals and flanged or standard NPT fittings. Both pump kits or motorized units are available.

Thousands of Applications

Stainless Steel Submersible Pumps

- · Drainage of excavated areas
- Car wash drainage pits
- · Water from basements
- Pool draining
- · Septic tank draining
- Transfer of waste water or effluent solutions to sewage and treatment systems
- Emptying vessels and above or underground storage tanks
- Marine bilge pumping
- Ink transfer systems
- Farm irrigation water
- · Waste water treatment systems
- · Circulating liquids throughout plants
- · Pharmaceutical products
- Ag chemicals

Stainless Steel End-suction Centrifugal Pumps

- Booster Pumps
- · Fire protection systems
- · Washing systems
- Spraying systems
- Beverage processing
- · High temp liquids and mild chemical transfer

See our complete line of high pressure, positive displacement, reciprocating pumps at www.catpumps.com.

1K Series - Submersible Sump Pumps

Stainless steel submersible sump pumps offer solutions to pumping semi-dirty water or fresh water with suspended solids up to 3/8".

Flow Range		up to 88 GPM
Pressure Range [up to 24 PSI]		
		3450 RPM
Discharge Fitting		1-1/4, 1-1/2" NPT
		1/3, 1/2, 3/4, 1, 1-1/2 HP
		Manual or Auto
Maximum Temperature	Continuous	122°F
·	Intermittent	140°F
Maximum Solids Diameter		3/8"



2K Series - Submersible Pumps

Stainless steel submersible pumps offer reliable pumping of freshwater or industrial waste water with suspended solids up to 2".

Flow Range		up to 180 GPM
Pressure Range [up to 19	.5 PSI]	46 Ft. Head
RPM	-	3450 RPM
Discharge Fitting		2" NPT
Horsepower		1/2, 1, 1-1/2, 2 HP
Operation		Manual or Auto
Maximum Temperature C	Continuous	104°F
· II	ntermittent	140°F
Maximum Solids Diameter	140°F 2"	



3K Series - End-Suction Centrifugal Pumps, Single and Two Stage

Stainless steel end-suction centrifugal pumps offer dependable performance and flexibility in moving high volume liquids at low pressure. Single stage sold as either Pump Kit or Motorized Unit. Two stage sold as Motorized Unit only.

Flow Range Pressure Range [up to 106 PSI]	
Minimum Inlet Pressure to Prime	
RPM	
Inlet Fitting	1-1/4, 1-1/2" NPT
Discharge Fitting	1" NPT
Shaft Seal	Mech Type 21
Horsepower Single Stage	
Two Stage	2, 3, 5 HP
Maximum Temperature Single Stage	160°F
Two Stage	140°F



4K Series - Centrifugal Pumps

Sold as Pump Kit or Motorized Unit.

Flow Range Pressure Range [up to 124 PSI]	
Minimum Inlet Pressure to Prime	
RPM	
Inlet Fitting Flange	ANSI 150
Discharge Fitting Flange	ANSI 150
Shaft Seal	Mech Type 21
Horsepower	1, 2, 3, 5, 7-1/2, 10, 15 HP
Maximum Temperature	



5K Series - Self Priming Centrifugal Pumps

Sold as Pump Kit or Motorized Unit.


Flow Range	up to18.5 GPM
Pressure Range [up to 82 PSI]	190 Ft. Head
RPM	3450 RPM
Inlet Fitting	1-1/4" NPT
Discharge Fitting	
Shaft Seal	Mech Type 21
Horsepower	1, 2 HP
Maximum Temperature	
·	




Performance Ranges

Performances at 1.0 SG. Additional horsepower required with higher SSU and SG.


1K Series Sump Pumps

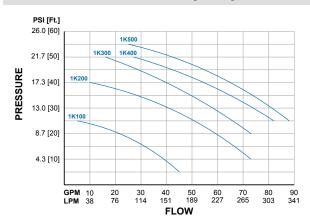


4K Series End Suction Pumps - 3450 RPM

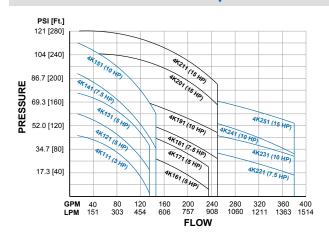


2K Series Submersible Pumps

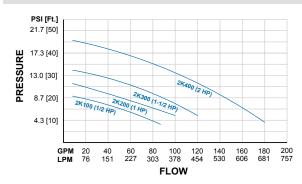


4K Series End Suction Pumps - 1725 RPM

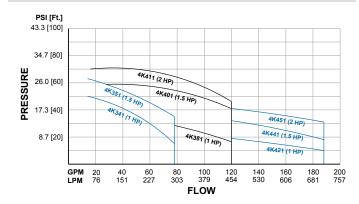

3K Series End Suction Pumps

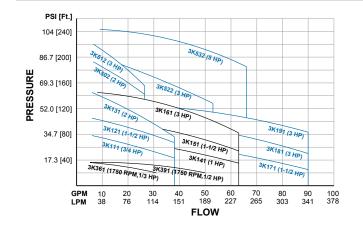

5K Series Self Priming Pumps

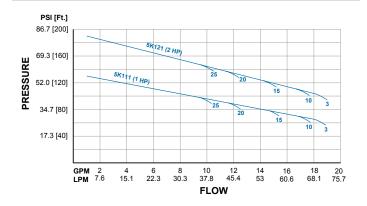

World Headquarters CAT PUMPS

1681 - 94th Lane N.E. Minneapolis, MN 55449 - 4324 Phone (763) 780-5440 — FAX (763) 780-2958 e-mail: techsupport@catpumps.com

www.catpumps.com **International Inquiries** FAX (763) 785-4329

Г

e-mail: intlsales@catpumps.com



CAT PUMPS (U.K.) LTD.

1 Fleet Business Park, Sandy Lane, Church Crookham, Fleet Hampshire GU52 8BF, England Phone Fleet 44 1252-622031 — Fax 44 1252-626655 e-mail: sales@catpumps.co.uk

N.V. CAT PUMPS INTERNATIONAL S.A.

Heiveldekens 6A, 2550 Kontich, Belgium Phone 32-3-450.71.50 — Fax 32-3-450.71.51 e-mail: cpi@catpumps.be www.catpumps.be

CAT PUMPS DEUTSCHLAND GmbH

Buchwiese 2, D-65510 Idstein, Germany Phone 49 6126-9303 0 — Fax 49 6126-9303 33 e-mail: catpumps@t-online.de www.catpumps.de