

Plunger Pumps

FEATURING

MANIFOLD: High strength forged brass for long term use.

BOLTS: Three 10mm grade 8.8.

PISTONS: Polished stainless steel for longer pump life in harsh environments.

CRANKCASE: Precision die-cast, large cooling fins for maximum heat dissipation.

BEARINGS: Angular contact ball bearing stabilizes the crankshaft and one thrust needle bearing absorbs the plunger load and assure long radial plate life. All of the thrust plates are made of heat treated hardened steel for extended life.

VALVES, SEATS, AND SPRINGS: Stainless steel with specially designed Ultra Form cages provide extra long life and positive seating.


SEALS AND V-PACKINGS: Continuously lubricating for extended life.

UNLOADER: Built in to optimize performance while reducing setup time. Integral trap pressure, fixed or adjustable chemical injector.

DIMENSIONS



XJW-E D version + F27
Hollow shaft pump $\varnothing$ 7/8"

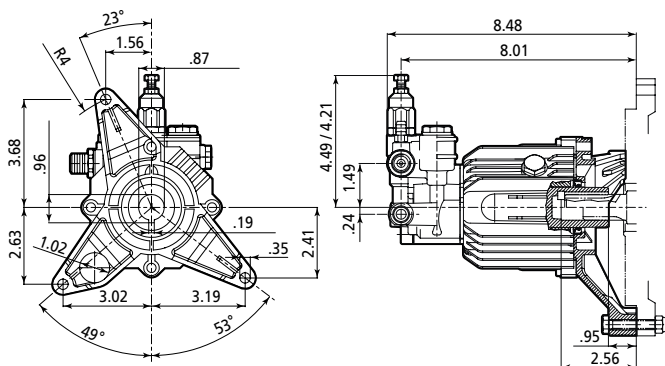

SPECIFICATIONS

MODEL	MAX GPM	MAX LMP	MAX PSI	MAX BAR	POWER EBHP	BORE DIA MM	STROKE MM	CRANKSHAFT ID STAMP	WEIGHT LBS.
XJW-E2G22D-F27	2.0	7.6	2200	150	3.0	15	4.8		11
XJW-E2.5G22D-F27	2.5	9.5	2200	150	3.7	15	5.8		11
XJW-E3G22D-F27	3.0	11.4	2200	150	4.5	15	6.8		11

Oil Capacity = 4.5 oz

Maximum Fluid Temperature = 140° F

Inlet Thread = 1/2" M


Discharge Thread = 3/8" M

Torque Specifications Inch pounds (ft. lbs)

HEAD	PISTON NUT	REAR COVER	SIDE COVER	VALVE CAP	CON RODS
443 (37)	N/A	228 (19)	N/A	400 (37)	N/A

SPECIAL NOTE: Use only AR64545 for the XJ/SJ/BK Series pumps only: Do NOT change oil. Use oil only to add if low. This oil is a specially formulated synthetic with special additives for the demands of the XJ, SJ and BK pump series. No other oil is factory approved for these pumps, and could result in pump failure.

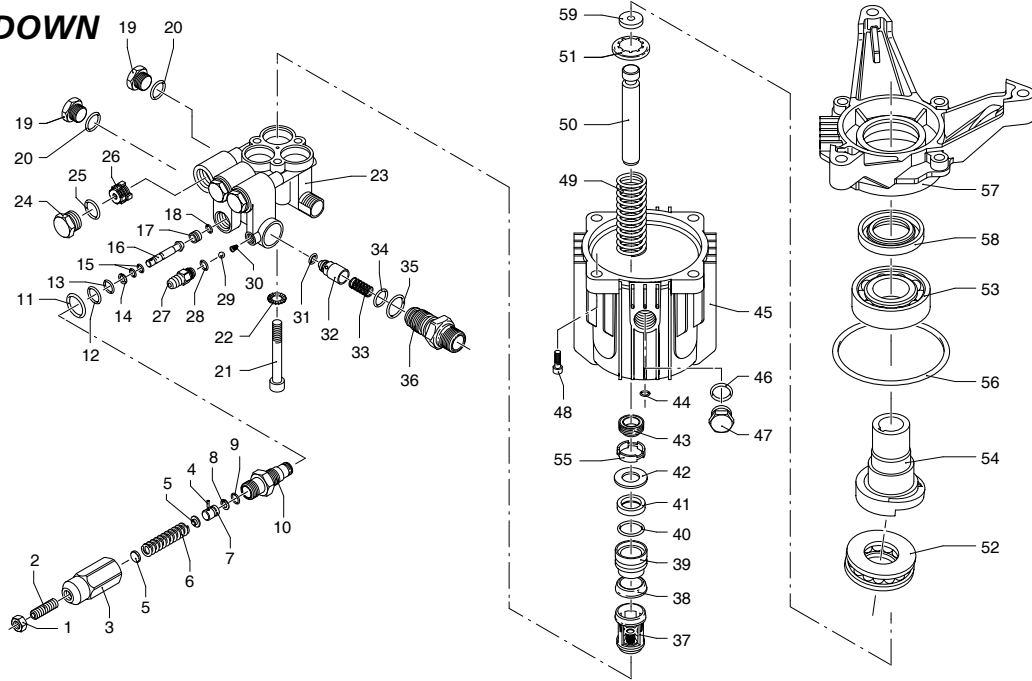

PARTS BREAKDOWN

Pos.	Code	Description	Qty.	Pos.	Code	Description	Qty.	Legend			
1	1980300	Nut	1	43	1980410	Seal	3	For ○	For □	For ▼	
2	392840	Adjusting screw	1	44	770090	O-Ring	1	XJW-E2G22	XJW-E2.5G22	XJW-E3G22	
3	1980540	Adjusting cap	1	45	1980460	Crankcase	1				
4	1080070	Pin	1	46	740290	O-Ring	1				
5	1980220	Plate spring	2	47	1980740	Oil plug	1				
6	1980520	Spring	1	48	180030	Bolt	4				
7	1080041	Upper piston	1	49	1981140	Spring	3				
8	1080401	Back-up ring	1	50	1981440	Piston	3				
9	1080250	O-Ring	1	51	1980150	Piston retainer (3 pc)	3				
10	1980530	Piston guide	1	52	1982290	Bearing	1				
11	880830	O-Ring	1	53	161060	Bearing	1				
12	740290	O-Ring	1	54	1981630	Angle plate	○ 1				
13	800560	O-Ring	1	54	1981640	Angle plate	□ 1				
14	1271170	Back-up ring	1	54	1981880	Angle plate	▼ 1				
15	1080190	O-Ring	2	55	1980430	Retainer	3				
16	1271160	Lower piston	1	56	1980340	O-Ring	1				
17	1980200	Piston seat	1	57	1981430	Flange	1				
18	1470210	O-Ring	1	58	1981730	Seal	1				
19	880581	Plug 1/4G	2	59	1981130	Plunger shoe	1				
20	820510	O-Ring	2								
21	1980310	Head bolt	3								
22	650530	Washer	3								
23	1981500	Pump head	1								
24	1260162	Valve cap	3								
25	960160	O-Ring	3								
26	1989061	Complete valve	6								
27	1560490	Chem barb	1								
28	480480	O-Ring	1								
29	1250280	Ball	1								
30	1560520	Spring	1								
31	1460430	O-Ring	1								
32	1540170	Check valve	1								
33	1080091	Spring	1								
34	394280	O-Ring	1								
35	1200690	O-Ring	1								
36	1270141	Detergent injector	1								
37	1989060	Complete valve	3								
38	2460180	High pressure packing	3								
39	1981470	Piston guide	3								
40	770130	O-Ring	3								
41	1260440	Low pressure seal	3								
42	1980170	Seal retainer	3								

Legend

For ○ For □ For ▼
XJW-E2G22 XJW-E2.5G22 XJW-E3G22

Repair Kits

Water Seal Kit 2582		Valve Kit 2581		Pistons Kit 2593		Oil Seals Kit 2511	
Pos.	Qty.	Pos.	Qty.	Pos.	Qty.	Pos.	Qty.
38	3	26	3	50	3	43	3
40	3	37	3			44	1
41	3					56	1
42	3						
55	3						

**Unloader Kit
Kit 2594**

Pos.	Qty.	Pos.	Qty.
1	1	10	1
2	1	11	1
3	1	12	1
4	1	13	1
5	2	14	1
6	1	15	2
7	1	16	1
8	1	17	1
9	1	18	1