



2500 PSI, Triplex Plunger Pump

- Solid ceramic plungers
- NEMA 184C mounting flange
- Forged brass manifold with an exclusive lifetime warranty and 4:1 hydrostatic rating
- Die-cast, anodized aluminum, oil-bath crankcase
- Premium roller bearing
- Unitized stainless steel inlet and discharge valves
- Ideal for all general pressure cleaning and washing applications
- Available in “L” left-handed versions

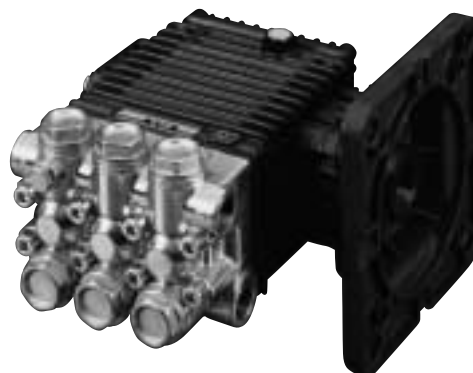

Pump Model	EZ2536E	EZ2542E	EZ2545E	EZ2555E
Maximum Volume	3.6 GPM	4.2 GPM	4.6 GPM	5.5 GPM
Maximum Discharge Pressure	2500 PSI			
Maximum Pump Speed	1750 RPM		3400 RPM	
Maximum Inlet Pressure	125 PSI			
Maximum Inlet Vacuum	3 ft. water (2.6 in. Hg)			
Bore	.708 in. / 18 mm		.591 in. / 15 mm	
Stroke (in./mm)	.433 / 11	.512 / 13	.433 / 11	.512 / 13
Crankcase Oil Capacity	14.0 oz.			
Maximum Fluid Temperature	165°F			
Inlet Port Thread	1/2-14 BSPP-F			
Discharge Port Thread	3/8-19 BSPP-F			
Hollow Shaft I.D .	1.125 in. / 28.5 mm			
Weight	18.5 lbs.			
Dimensions	8.8 x 8.8 x 6.3 in.			

[illegible]

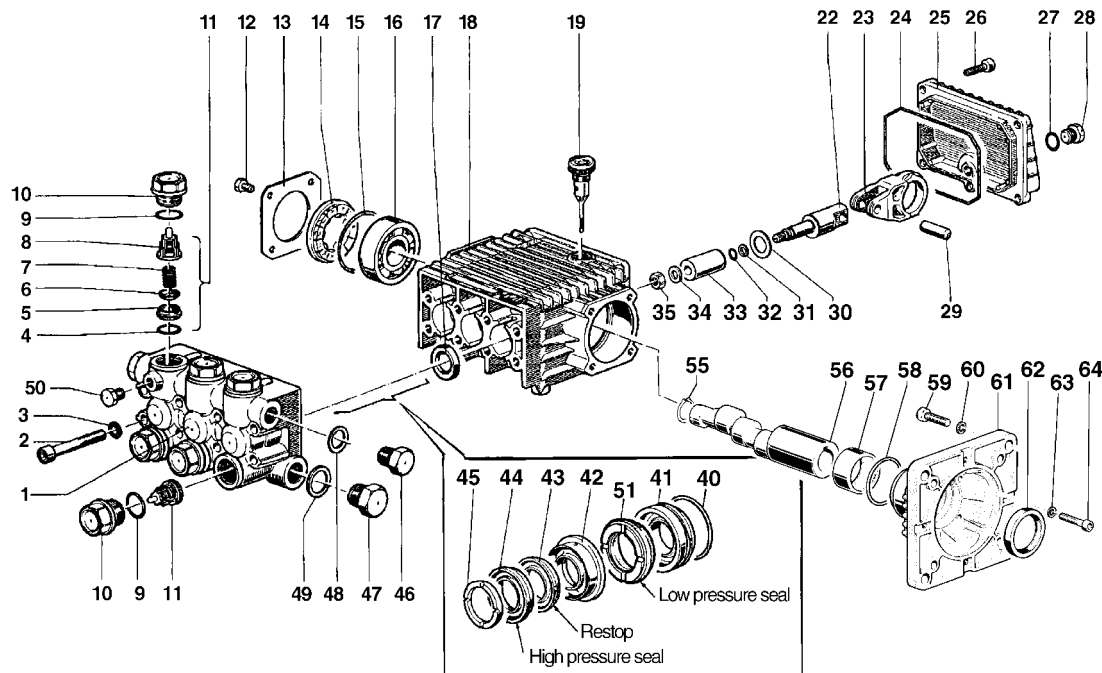

PARTS LIST

Item	Part No.	Description	Kit No.	Qty.	Item	Part No.	Description	Kit No.	Qty.	Item	Part No.	Description	Kit No.	Qty.
1	44.1200.41	Manifold (15 mm)		1	29	97.7340.00	Pin		3	45	44.1001.51	Head Ring	129, 131	3
	44.1204.41	Manifold (18 mm)			30	96.7350.00	Washer		3			(EZ2536E, EZ2542E)		
2	99.3175.00	Screw		8	31	90.5022.00	Anti-Extrusion Ring		3		51.1000.51	Head Ring	90, 130	
3	96.7014.00	Washer		8	32	90.3572.00	O-Ring		3			(EZ2545E, EZ2555E)		
4	90.3841.00	O-Ring	123	6	33	44.0401.09	Plunger, 18mm (EZ2536E, EZ2542E)		3	46	98.2100.00	Cap Screw		1
5	36.2003.66	Valve Seat	123	6		52.0400.09	Plunger, 15mm (EZ2545E, EZ2555E)			47	98.2176.00	Cap Screw		1
6	36.2001.76	Valve	123	6	34	96.7008.00	Washer		3	48	96.7380.00	Washer		1
7	94.7376.00	Spring	123	6	35	92.2216.00	Nut		3	49	96.7514.00	Washer		1
8	36.2025.51	Valve Cage	123	6	40	90.3612.00	O-Ring	126, 131	3	50	98.1966.00	Cap Screw		1
9	90.3847.00	O-Ring	124	6			(EZ2536E, EZ2542E)			51	90.2684.00	Seal, Low Press.	127, 131	
10	98.2226.00	Cap Screw	124	6		90.3612.00	O-Ring	125, 130				(EZ2536E, EZ2542E)		
11	36.7115.01	Valve Assembly	123	6			(EZ2545E, EZ2555E)				90.2617.00	Seal, Low Press.	88, 130	3
12	99.1807.00	Screw		4	41	44.0801.70	Packing Retainer	126, 131	3			(EZ2545E, EZ2555E)		
13	50.1500.74	Bearing Cover		1			(EZ2536E, EZ2542E)			55	90.0635.00	Cir-Clip		1
14	44.2118.01	Spacer		1		44.0800.70	Packing Retainer	125, 130		56	44.0214.65	Crankshaft (EZ2536E, EZ2545E)		1
15	90.4097.00	O-Ring		1			(EZ2545E, EZ2555E)				44.0216.65	Crankshaft (EZ2542E, EZ2555E)		
16	91.8328.00	Ball Bearing		1	42	44.2161.70	Intermediate Ring	128, 131	3	57	91.8568.00	Bearing		1
17	90.1614.00	Oil Seal	23	3			(EZ2536E, EZ2542E)			58	90.4097.00	O-Ring		1
18	44.0100.22	Crankcase		1		52.2166.70	Intermediate Ring	89, 130		59	99.4600.00	Screw		4
19	98.2103.00	Oil Dip Stick		1			(EZ2545E, EZ2555E)			60	96.7195.00	Washer		4
22	44.0500.66	Plunger Guide		3	43	90.2683.00	Packing	127, 131	3	61	10.0504.22	Elect. Flange		1
23	44.0300.22	Connecting Rod		3			(EZ2536E, EZ2542E)			62	90.1690.00	Seal		1
24	90.3920.00	O-Ring		1		90.2622.00	Packing	88, 130		63	96.6938.00	Washer		4
25	44.1600.22	Rear Cover		1			(EZ2545E, EZ2555E)			64	99.1912.00	Screw		4
26	99.1837.00	Screw		5	44	90.2682.00	Packing	127, 131	3					
27	90.3585.00	O-Ring		1			(EZ2536E, EZ2542E)							
28	98.2041.00	Cap Screw		1		90.2620.00	Packing	88, 130						
							(EZ2545E, EZ2555E)							

REPAIR KITS

KIT NO.	23	88 or 127	89 or 128	90 or 129	123	124	125 or 126	130 or 131
ITEM NO.s INCLUDED IN KIT	17	43, 44, 51	42	45	4, 5, 6, 7, 8, (11)	9, 10	40, 41	40, 41, 42, 43, 44, 45, 51
NUMBER OF ASSEMBLIES IN KIT	3	3/6	3	6	6	6	3	1
NUMBER OF CYLINDERS KIT WILL SERVICE	3	3	3	3	3	3	3	1

TORQUE SPECS*

Position	Ft.-lbs.	N-M
2	14.7	20
10	73.7	100
12	7.3	10
26	7.3	10
28	14.7	20
35	11.0	15
46	29.4	40
47	29.4	40
50	9.6	13
59	14.7	20
64	7.3	10

*Decrease torque by 20% if threads are lubricated.